

Vacmobile Consumables

Tubing, spiral wrap, tubing cutter, disposable valves, plastic fittings.

Translucent extruded polyethylene vacuum and resin feed tubing

Our premium quality polyethylene tubing resists vacuum collapse at high ambient temperatures and recovers well after clamping off.

Outside diameter	Inside diameter	Coil length
10 mm (0.394")	6.8 mm (0.268")	100 metres (328 feet)
12.7 mm (0.500")	9.4 mm (0.370")	100 metres (328 feet)
16 mm (0.625")	11.8 mm (0.465")	50 metres (164 feet)
23 mm (0.906")	19 mm (0.750")	100 metres (328 feet)



Spiral cut translucent extruded polyethylene distribution tubing (Spiral wrap)

Translucent polyethylene spiral wrap. Resistant to vacuum collapse at high ambient temperatures and allows visible inspection of resin movement.

Outside diameter (nominal)	Inside diameter (nominal)	Coil length
10 mm (0.394")	6.8 mm (0.268")	15 metres (49 feet)
12 mm (0.472")	8.6 mm (0.340")	15 metres (49 feet)
21 mm (0.827")	17 mm (0.670")	15 metres (49 feet)




Tubing cutter

Tubing cutter for clean cuts in polyethylene tubing up to 23 mm (0.9") in diameter.



Disposable O-ring sealed valves

Low cost valves to suit 12.7 mm (1/2") and 19 mm (3/4") inside diameter tubing. O-ring sealed, but O-rings not suitable for long term exposure to solvents such as styrene. Normally limited to single uses when infusing.

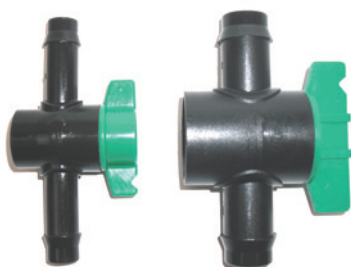

Plastic fittings

Joiners, elbows and tees to suit our standard tubing.

